



# MiniFil

Art. No.: 65 150



## Technical Data

| Filter                 |                        |
|------------------------|------------------------|
| Filter stages          | 3                      |
| Filter method          | Storage Filter         |
| Filter surface         | 12 m <sup>2</sup>      |
| Type of filter         | Safe Change Filter     |
| Filter material        | Non-woven polyester    |
| Filter efficiency      | > 99 %                 |
| Filter class           | H13                    |
| Additional filters     | Cyclone pre-filter     |
| Additional filters     | Pre-filter (aluminium) |
| Basic data             |                        |
| Extraction capacity    | 150 m <sup>3</sup> /h  |
| Weight                 | 20 kg                  |
| Turbine                | 2pce. each 1kW         |
| Motor power            | 2 kW                   |
| Power supply           | 1 x 230 V / 50 Hz      |
| Rated current          | 10 A                   |
| Control voltage        | 24 V, DC               |
| Noise level            | 74 dB(A)               |
| Additional information |                        |
| Fan type               | Suction turbine        |
| Hose connection        | Ø 45 mm                |

## Applications

- Suitable for all materials, including high-alloy steel
- Low amounts of smoke/dust
- Occasional use
- Nozzles, funnel and torch extraction

## Benefits

- Energy-saving operation with integrated automatic start/stop function for AC/alternating current
- Increased safety with safe filter change
- Ideal for changing workplaces due to its low weight and optional trolley
- Optimal adjustment to the welding process with stepless speed control

## Properties

- Filter monitoring
- Stepless speed control
- Safe Change Filter
- Start/Stop-Automatic for alternating current
- Spark separator





## Accessories

- Trolley
- Various hose lengths
- Various extraction nozzles

Cuffesgrange, Co.Kilkenny PH: (056) 7729949

Portlaoise, Co.Laois PH: (057) 8621479

info@kws.ie www.kws.ie

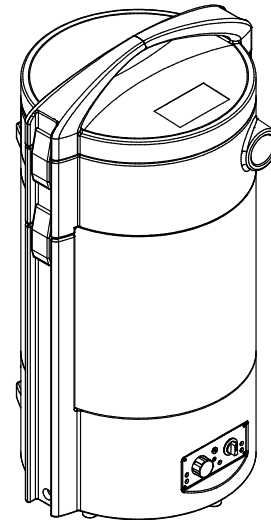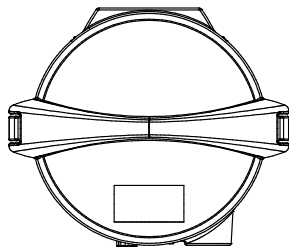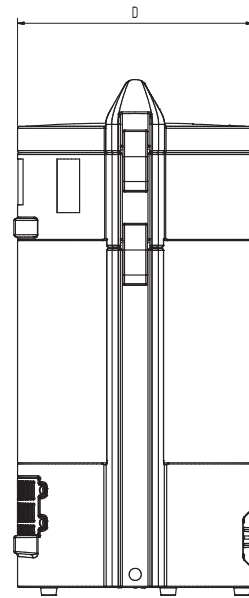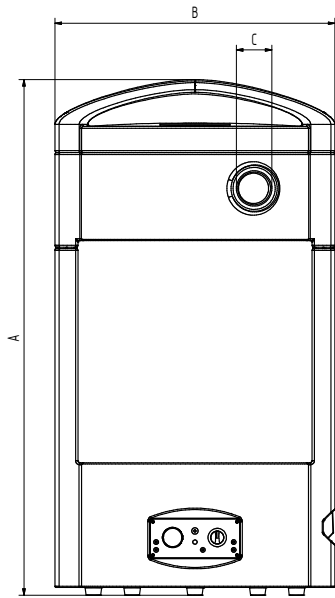

## Technical Data

### Dimensions

|   |        |
|---|--------|
| A | 790 mm |
| B | 425 mm |
| C | 45 mm  |
| D | 365 mm |

Kilkenny Welding Supplies LTD.

Cuffesgrange, Co.Kilkenny PH: (056) 7729949

Portlaoise, Co.Laois PH: (057) 8621479

info@kws.ie www.kws.ie

**KEMPER**